

#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:
G06F 19/00
A1
(11) International Publication Number: WO 00/16229
(43) International Publication Date: 23 March 2000 (23.03.00)

(21) International Application Number: PCT/US99/18851 (81) Designated States: AU, CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC;

(22) International Filing Date: 10 September 1999 (10.09.99) NL, PT, SE).

US

(71) Applicant: PREVIEW SYSTEMS, INC. [US/US]; 1601 S. De Anza Boulevard, Suite 100, Cupertino, CA 95014 (US).

11 September 1998 (11.09.98)

(72) Inventors: FLOYD, Michal; 767 Upland Road, Redwood City, CA 94062 (US). HORSTMAN, Cay, S.; 11801 Sierra Spring Court, Cupertino, CA 94014 (US). LUNDE, Ron, E.; 2016 N.E. Irving, Portland, OR 97232 (US).

(74) Agent: KREBS, Robert, E.; Burns, Doane, Swecker & Mathis, LLP, P.O. Box 1404, Alexandria, VA 22313-1404 (US).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.


(54) Title: SERVER-SIDE COMMERCE FOR DELIVER-THEN-PAY CONTENT DELIVERY

#### (57) Abstract

(30) Priority Data:

09/151,296

present The invention provides a mechanism for a payment/unlock transaction for deliver-then-pay content (103) distribution. The purchase is effected by interacting with a commerce Web site (111). The content is unlocked by delivering to the client a certificate, which serves as proof of purchase. The certificate is rendered secure (105) so that it cannot be replicated to gain additional unauthorized access. Downloading and processing of the certificate can be done without user-intervention. Piracy is prevented by "individuation" of the certificate. The certificate is generated in a unique manner when it is first provided to the consumer. Alternatively, the first time a certificate is processed on an end-user machine (100), the certificate together with unique local machine information and/or user information is then presented back to the server for validation. The server can therefore control how many times a certificate is used.

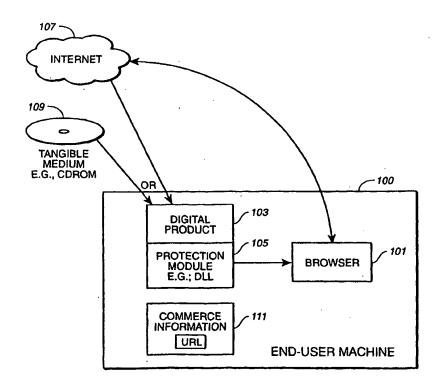

# FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ircland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KB	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba ** ·	- KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# SERVER-SIDE COMMERCE FOR DELIVER-THEN-PAY CONTENT DELIVERY

### **BACKGROUND OF THE INVENTION**

## 1. Field of the Invention

5

10

15

20

25

The present invention relates to deliver-then-pay distribution of electronic content, e.g., software, images, sounds, etc.

#### 2. State of the Art

Internet commerce continues to experience explosive growth. Internet commerce is especially well-suited to the delivery of electronic content, e.g., software, images, sounds, etc. However, electronic content distribution (ESD, a subset of which is electronic software distribution, or ECD), poses particular difficulties due to attempted misappropriation, i.e., software piracy. Two different models of ECD are pay-then-deliver and deliver-then-pay. Related but somewhat different terms applied to ECD are "Buy-Before-You-Try" (Buy/Try) and "Try-Before-You-Buy" (Try/Buy). Try/Buy ECD technology, as the name suggests, allows a potential customer to try a piece of software (or other electronic content) before deciding whether or not to purchase the software. A limited trial period is allowed. In this instance, the piece of software (or data) has already been delivered to the consumer but is still protected (e.g., encrypted) and needs to be "purchased" (rented, leased, etc.) in order to be unlocked for a longer duration and therefore be useful for the consumer.

Existing Try/Buy purchase mechanisms are client-based and rely on capturing the consumer's credit data (e.g., credit card number, billing address) on the consumer's machine and transmitting this information to a server to validate

10

15

20

25

the credit data and execute the purchase transaction. The server then returns an "unlock code" or "decryption key." This approach is used by a Vbox™ ECD product of the present assignee as well as other products within the same category from such vendors as TechWave, Release Software, and Ziplock. The foregoing approach, however, is inflexible. For example, typically only credit cards are supported. The currency is restricted to those supported in the client. Furthermore, absent a mechanism to allow price lookup to be done during a transaction, the product price must be "hard-wired" into the product before it is downloaded.

Other ECD mechanisms have used certificates to allow a product to be downloaded. Ziplock's Zert™ certificate is fetched by the client upon completion of a purchase transaction. Cybersource's Sm@rtCert™ is an X.509 certificate that includes merchandising information and a URL that allows a product to be downloaded. However, both these models support only pay-then-deliver (i.e., the "certificate" provides the capability to download the product) and do not support Try/Buy.

Other types of payment and delivery mechanisms, both present and future, may be expected to strain the capabilities of current systems. Distribution may not be by electronic download but may be by CD or the like, which most current distribution models are ill-equipped to handle. Also, a Web-based electronic wallet system is currently under development to reduce credit card fraud. The ability to achieve compatibility with such an electronic wallet system relatively painlessly is much to be desired.

What is needed is a more flexible mechanism for effecting a payment/unlock transaction for deliver-then-pay content distribution.

## SUMMARY OF THE INVENTION

The present invention, generally speaking, provides a flexible mechanism for effecting a payment/unlock transaction for deliver-then-pay content

10

15

20

25

distribution. Instead of interacting with a local client interface, purchase is effected by interacting with a commerce Web site. The content is unlocked by delivering to the client a certificate, which serves as proof of purchase. The certificate is rendered secure so that it cannot simply be replicated to gain additional unauthorized access. In a preferred embodiment, a local application (e.g., a stand-alone application or a browser plug-in) is present on the end-user's machine and is registered with the local operating system and browser to handle files of a particular type used for certificates. Downloading and processing of the certificate may therefore be done transparently, without user-intervention. Piracy is prevented by "individuation" of the certificate. If the certificate simply unlocked the product, then nothing would prevent that certificate from simply being moved to any number of other machines or used by multiple unauthorized users. To prevent this, certificate individuation is performed. Preferably, the certificate is generated in a unique manner when it is first provided to the consumer. Alternatively, the first time a certificate is processed on an end-user machine, the certificate together with unique local machine information (such as the hard drive ID) and/or unique user information (e.g., biometric information such as fingerprint information, information from a smart card, etc.) is then presented back to the server (either the original server or a separate reference server) for validation. The server can therefore control how many times a certificate is used.

## BRIEF DESCRIPTION OF THE DRAWING

The present invention may be further understood from the following description in conjunction with the appended drawing. In the drawing:

Figure 1 is a block diagram of a system in which the present invention may be used;

Figure 2 is a "buy me" screen display produced by the usage rights acquisition interface control of Figure 1;

10

15

20

25

Figure 3 is a "shopping cart" screen display;

Figure 4 is a block diagram illustrating an electronic payment transaction and delivery of a certificate evidencing usage rights;

Figure 5 is a block diagram illustrating an electronic payment transaction during which binding information is uploaded from the end-user machine and delivery of a certificate incorporating binding information;

Figure 6 is a block diagram illustrating tender of a serialized, unbound certificate, together with binding information and delivery of a certificate incorporating binding information;

Figure 7 is a block diagram illustrating certificate validation processing options;

Figure 8 is a block diagram showing a single-server system in which the present invention may be used; and

Figure 9 is a block diagram of a multiple-server system in which the present invention may be used.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Figure 1, a block diagram is shown of a system in which the present invention may be used. An end-user machine 100 is shown as including a browser 101 or similar program that interfaces with a server location and enables the user to request the granting of usage rights. A digital product 103 and an associated protection module 105 are delivered to the end-user machine, either on-line, e.g., through a computer network 107 such as the Internet, or off-line, e.g., through a tangible medium 109 such as a computer hard drive, CD-ROM, etc. The protection module may take the form of code "injected" into the product for example, using techniques practised in the art or as described more fully in co-pending U.S. patent application \_\_\_\_\_\_ (Atty. Dkt. 031994-003), incorporated herein by reference. The protection module may take the form of a Dynamic Link Library (DLL). Alternatively, the protection module may take the form of API

10

15

20

25

calls inserted into the original source code of a software program. Still other types of protection modules will be apparent to one of ordinary skill in the art. For example, the protection module may be part of a Try/Buy software application or a plug-in for a browser or other application having a plug-in architecture. The protection module may be a program that conditionally decrypts content and interfaces with off-the-shelf software (e.g., Microsoft Word™, Adobe Acrobat™, etc.).

Besides the protection module, also associated with the digital product is commerce information 111, typically including a server location (URL). The commerce information may be stored as part of or apart from the digital product or protection module. The product, the protection module and the commerce information may be installed on or stored on the user machine together during a single overall operation or separately. In one embodiment, the product, the protection module and the commerce information are downloaded as a single installation-ready package and installed together.

When use of the product is attempted, the protection module determines whether such use is authorized. In the case of Try/Buy ECD, for example, a 30-day free trial may be allowed. The protection module displays to the user trial status information (e.g., 10 days remaining, 5 uses remaining, etc.). The protection module also displays a user interface control for buying additional use of the product (Figure 2). A purchase transaction is carried out by a commerce system running on the server. As part of this transaction, an off-the-shelf viewer such as a Web browser or a custom viewer program retrieving presentation information from the server displays a page such as that of Figure 3 is displayed to the user, ultimately instructing the user to click on a "Get Certificate" link having a particular MIME type.

Referring more particularly to Figure 4, the protection module first displays a dialog to the user (Step 1). When the user activates the user interface

10

15

20

25

control (clicks "buy," Step 2), the following sequence of events ensues. The protection module uses the browser to access the commerce information stored on the user machine. The commerce information designates a server that includes transaction processing software and either includes or is network-connected to a certificate database. The browser is started at the server URL (Step 3), and the server presents to the user a Web page used to provide purchase information. The user completes the Web page by filling in purchase information (Step 4) and submits it to the server (Step 5). A purchase transaction is then carried out using known methods of electronic commerce. Various known security mechanisms may be used during transaction processing, e.g., Secure Socket Layer (SSL), Secure Electronic Transaction (SET), etc. Furthermore, payment may be effect in any manner supported by the server. Whereas credit cards are typically used for consumer transactions, other types of transactions may use purchase orders, corporate lines of credit, etc. If the browser supports electronic wallets, then this capability can automatically be taken advantage of for purchase transactions.

Referring still to Figure 4, if transaction processing is successful, then a certificate is downloaded to the user machine (Step 6). The certificate may be a file of a specific type, for example. The certificate will typically contain a rights statement of some type and will be secured using a tamperproof mechanism. For example, the certificate may be encrypted such that a hacker cannot tell how to alter the certificate to accomplish the hacker's purpose, or the certificate may be signed using a digital signature such that any tampering may be readily detected. The rights statement may vary depending on implementation. For example, the rights statement may simply be the name of the digital product, purchase of the product being implied. Alternatively, the rights statement may entitle the user to use the digital product for a limited period of time, a limited number of uses, etc.

At the user machine, a predetermined certificate installation module optionally receives and installs the certificate (Step 7). The certificate installation

10

15

20

25

module may be a plug-in, an Active X control, a MIME type handler, or other mechanism to automatically process the certificate data and may be registered with the browser to handle files of that specific type. The module may be the protection module or some other module. Alternatively, the certificate may come appended to an executable program that the user then executes. When the program executes, it stores the certificate in the correct place for the protection module to later find it. Of course, there may be no module or program provided to handle the certificate and store in the correct place. In this instance, the user is required to store the certificate in the correct place. Preferably, however, the user is shielded from this detail by one of the former mechanisms, resulting in a more pleasant user experience.

The foregoing process in accordance with an exemplary embodiment may be summarized as follows:

- The protection module ensures that a certificate installation program for installing the certificate is registered with the browser (i.e., as a handler for certificate files as represented by a particular MIME type) or otherwise installs the program.
- 2. The protection module launches the browser to go to the purchase URL. The protection module may also send to the server via the browser local information such as binding information.
- 3. A purchase transaction is carried out by a commerce system running on the server. As part of this transaction, a Web page such as that of Figure 3 is displayed to the user instructing the user to click on a "Get Certificate" link having the particular MIME type previously mentioned.
- 4. The user clicks on the link.
- 5. The certificate installation program receives and installs the certificate.

10

15

20

25

If it is desired to prevent transfer of the certificate to another machine or user, "individuation" of certificates may be performed. Individuation allows verification to be performed prior to allowing use of the digital product. Two possibilities of such verification will be described hereafter.

Individuation may occur prior to download of the certificate or after download of the certificate. Furthermore, various different kinds of individuation may be performed including, for example, one-step binding individuation and two-step binding individuation. In one-step binding, binding information identifying a particular machine or a particular user is sent to the server and added to the certificate, after which the certificate is digitally signed and downloaded to the end-user machine (Figure 5). In the case of machine binding, the binding information is derived from the hardware and/or software of the user machine. For example, hardware binding information may come from a hard disk ID, a network card unique ID, IDs derived from plug-in cards, processor type, and so on. In the case of user binding, the binding information may be an ID derived from a fingerprint, a smartcard, a user-chosen password, etc., or some combination of the foregoing.

In some instances, one-step binding is problematic. In the case of user binding based on fingerprints, for example, the binding information may be quite large. It may be difficult to cause the browser to transport a large amount of binding information up to the server. Similarly, where the server functionality is distributed among multiple servers, it may be difficult to cause a commerce system to transport a large amount of information to a certificate issuer server.

The foregoing difficulties may be overcome using two-step binding. In two-step binding, the first step involves sending a serialized certificate. Referring to Figure 6, the second step involves trading the serialized certificate for a bound certificate. To avoid a replay attack, some mechanism is required on the server side to keep track of which serialized certificates have been traded in this fashion.

10

15

20

25

A protection module, instead of connecting to the server through a browser, may establish a direct connection, allowing for the exchange of data of arbitrary length. Similarly, communication between a merchant Web site and a certificate issuer Web site (if separate from the merchant Web site) may be handled without involvement of the commerce system, or "storefront," of the merchant Web site.

As has been described, certificate individuation may be performed in may different ways. Verification may also be performed in many different ways. Verification requires secure storage in order to store information needed to positively identify a particular certificate. Secure storage may be located on-and hence verification may be performed at—the server machine, the client machine, or both. Each alternative has its relative advantages and relative disadvantages. Server validation is most secure but also requires a large amount of central storage and a permanent connection of the client machine to the server. Client validation is less secure but does not require a large amount of central storage or permanent connection of the client machine to the server. A combination of server and client validation provides a lesser degree of security than server validation but requires only intermittent connection of the client machine to the server. Server validation and combined server/client validation may involve periodic reissuance or revalidation of the certificate. For example, using server validation, if a certificate gives the right for some number of uses of the digital product, then each time the digital product is used, the old certificate may be traded for an update certificate containing within the certificate itself the number of uses remaining.

Referring to Figure 7, when the user attempts to use the product, the protection module looks to see whether a certificate for the product is stored on the user machine. If so, the protection module proceeds to validate the stored certificate, either on-line by connecting to the server through the browser or off-line locally. If on-line, the certificate is presented to the server. The server validates the certificate by checking in the certificate database whether or not the

10

15

20

25

particular certificate being presented has been presented previously and whether further presentations are allowed. An entry is updated in the certificate database that keeps track of the number of times the particular certificate has been presented. If the certificate limits are met, a message or a second certificate is sent back to the protection module on the user machine validating the certificate and authorizing use based on the certificate for the duration of the certificate period. If the server finds that the particular certificate has already been presented the maximum number of times (or more), then the server invalidates the certificate and instructs the protection module to not allow the product to be used based on the certificate.

Validation requirement may vary from "validate once" to "validate always." For example, if initial validation is successful, the protection module may then store an indication that the product is "paid up." The next time use of the product is attempted, the protection module may allow use without checking with the server. Alternatively, validation may be required every use, every N-th use, or at periodic time intervals.

It should be noted that the present invention may be used in systems having centralized server-side functionality and in systems having greater or lesser degrees of distributed server-side functionality. Referring to Figure 8, for example, a single server performs payment processing, certificate issuance and certificate validation. Referring to Figure 9, on the other hand, each of these functions is performed by a separate server.

It will be appreciated by those of ordinary skill in the art that the invention can be embodied in other specific forms without departing from the spirit or essential character thereof. The presently disclosed embodiments are therefore considered in all respects to be illustrative and not restrictive. The scope of the invention is indicated by the appended claims rather than the foregoing description,

-11-

and all changes which come within the meaning and range of equivalents thereof are intended to be embraced therein.

10

15

#### What is claimed is:

1. A deliver-then-pay method of electronic content distribution, comprising the steps of:

providing as part of a digital product a usage rights acquisition interface control and a server location for rights acquisition;

providing on a server location presentation and business logic for usage rights acquisition; and

users of the digital product using the usage rights acquisition interface control to activate a program that interacts with the server location.

- 2. The method of claim 1 where said activated program is a web browser interacting with a web server.
- 3. The method of claim 1 where said activated program interacts with the server location to cause the user to pay for usage rights by supplying payment information.
- 4. The method of claim 1 where said activated program interacts with the server location to cause the user to supply a commitment to pay for usage rights by supplying proof of identity and commitment information.
- 5. The method of claim 1 where said activated program offers the user a choice of payment currencies.

- 6. The method of claim 1 where said activated program interacts with the server location to cause the user to supply a proof of prior authorization for usage rights.
- 7. The method of claim 1 where activation of said program interacting with the server location causes transmittal of local information to the server location without requiring user interaction.
  - 8. The method of claim 7 where said local information contains binding information related to the user's computer system.
- 9. The method of claim 7 where said local information contains user identity information.
  - 10. The method of claim 9 where said user identity information contains biometric information.
  - 11. The method of claim 9 where said user identity information contains smartcard information.
- 15 12. The method of claim 7 where said local information contains payment information.
  - 13. The method of claim 7 where said local information contains information on desired usage rights.
- The method of claim 7 where said local information containsinformation on existing usage rights.

- 15. The method of claim 7 where said local information contains a unique identification number.
- 16. The method of claim 1, further comprising the step of the server location returning a usage rights certificate.
- The method of claim 16, comprising the further step of the activated program causing a certificate installation module that is present on the user machine to process said usage rights certificate.
  - 18. The method of claim 16, wherein the digital product includes a protection module, the method comprising of the further step of using information contained in the usage rights certificate to cause the protection module to permit or deny usage of said digital product.
    - 19. The method of claim 16, wherein the server embeds individuation data in the certificate.
- 20. The method of claim 16 where said individuation data contains binding information related to the user's computer system.
  - 21. The method of claim 16 where said individuation data contains user identity information.
  - 22. The method of claim 21 where said user identity information contains biometric information.

- 23. The method of claim 21 where said user identity information contains smartcard information.
- 24. The method of claim 16 where said individuation data contains information on usage rights.
- 5 25. The method of claim 16 where said individuation data contains a unique identification number.
  - 26. The method of claim 16, where the certificate is digitally signed.
  - 27. The method of claim 16, further comprising performing local validation of the certificate on the user's computer system based on individuation data and local information.
    - 28. The method of claim 16, further comprising establishing a network connection and presenting validation information to a server.
- The method of claim 28, wherein said validation information contains individuation data.
  - 30. The method of claim 28, wherein said validation information contains local information.
  - 31. The method of claim 28, wherein the server performs validation of the validation information and returns the result of said validation.

- 32. The method of claim 28, wherein the server performs validation of the validation information and upon successful validation returns a new certificate.
- 33. The method of claim 32, wherein said new certificate has the same structure as the old certificate.
- 5 34. The method of claim 32, wherein said new certificate has a different structure than the old certificate.
  - 35. The method of claim 28, wherein the server records validation events.
- 36. The method of claim 35, wherein server validation is dependent on the frequency of validation events.
  - 37. The method of claim 35, wherein server validation is dependent on the user's fulfillment of payment commitment.
  - 38. The method of claim 27, wherein the user's computer system records validation events.
- The method of claim 38, wherein local validation is dependent on the frequency of validation events.
  - 40. The method of claim 28, wherein the server performs validation of the validation information and upon successful validation returns at least one additional digital product.

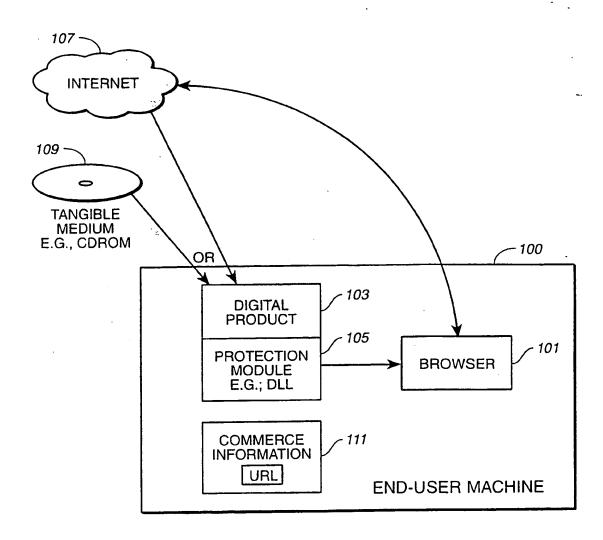


FIG.\_1


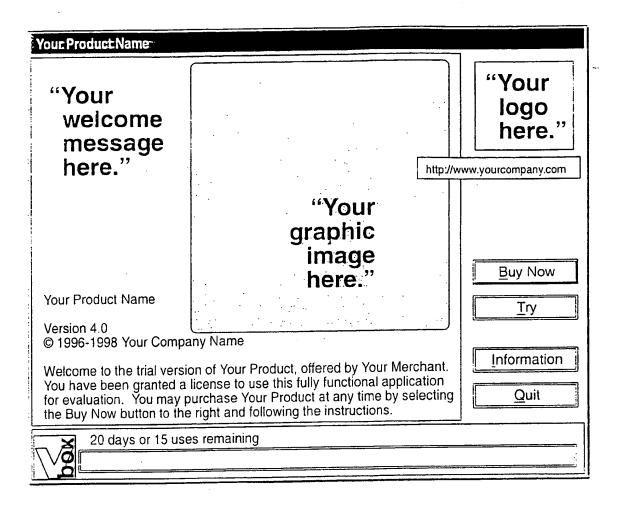


FIG.\_2

母 Your Order - Netscape: □□区							
<u>File Edit View Insert Tools</u>							
Back Forward Reload Home Search Netscape Images Print Security Stop							
Bookmark Netsite:   Bookmark Netsite:   http://www.software.net/orders/list_order.htm?7000000019664   ▼							
○ Home ○ Specials ○ Software ○ Customer ○ Corporate ○ Download ○ Shopping ○ Center ○ Q & A ○ Cart							
software net THE Software Superstore Shopping Cart							
Search for more products  Checkout Using our secure server							
If you get an error when you try to checkout you may be behind a firewall that does not support secure transactions. If this happens you can use our regular server.							
Your Shopping Basket Contains							
Oty Description Unit Total Stock Price Price (as of 6 Am pacific time)							
Country Garden Spring V1.0 for Win 95/NT (32-bit Windows • ESD)							
Subtotal: \$12.99							
To change a quantity, enter the new quantity above (if you have changed your mind about an item just change the quantity to 0). Important: Your change will not be seen by the system if you don't click this button Change Quantity							
Search for more products  Checkout  Using our secure server							

FIG.\_3

SUBSTITUTE SHEET (RULE 26)

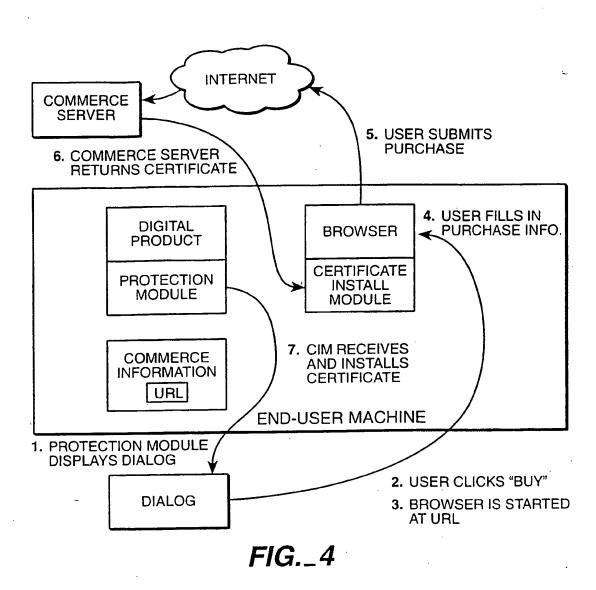

SUBSTITUTE SHEET (RULE 26)



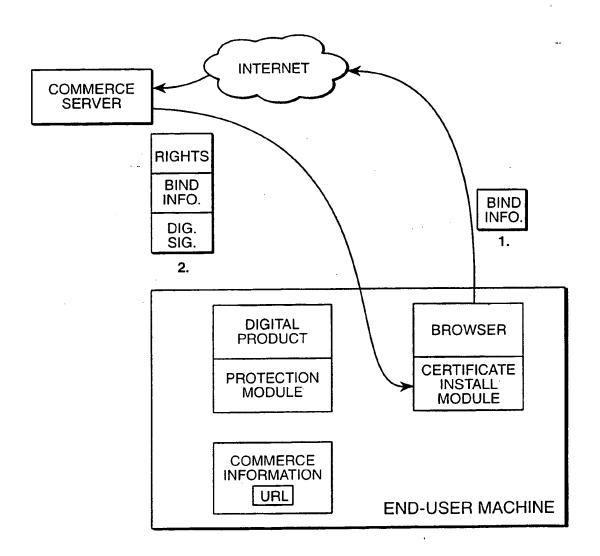


FIG.\_5

SUBSTITUTE SHEET (RULE 26)

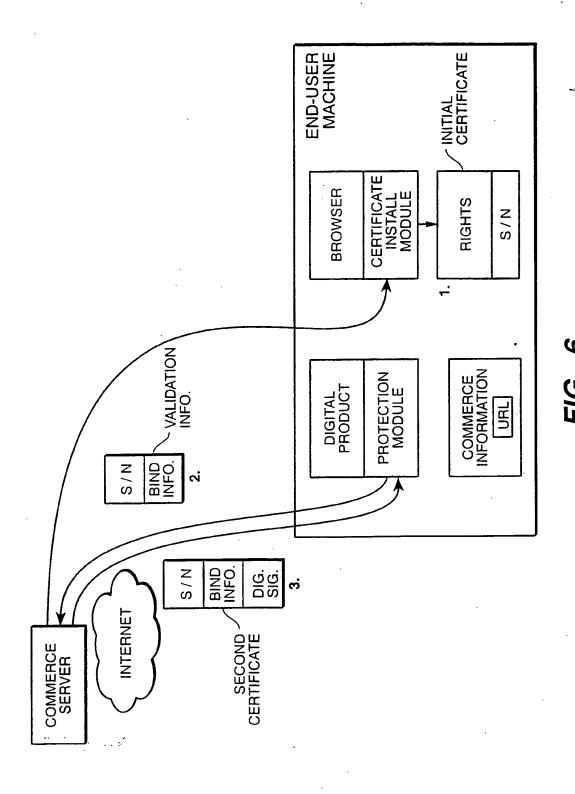


SUBSTITUTE SHEET (RULE 26)

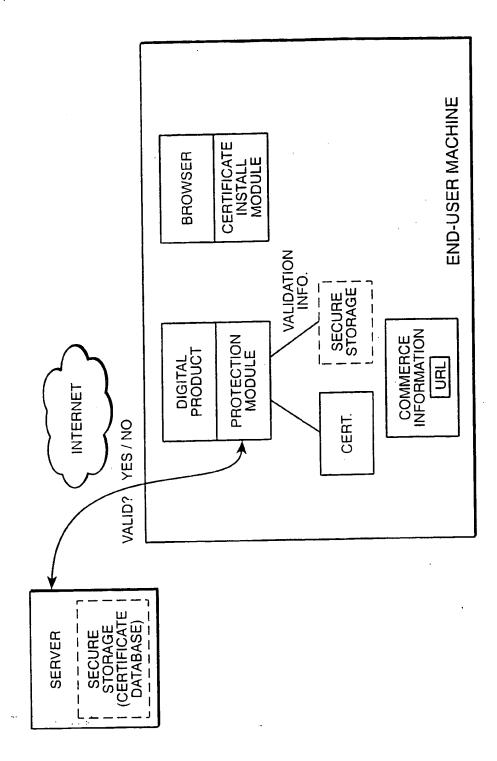

FI

SUBSTITUTE SHEET (RULE 26)

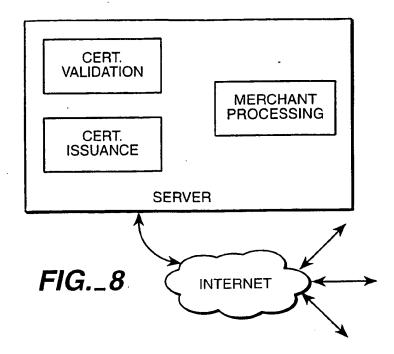

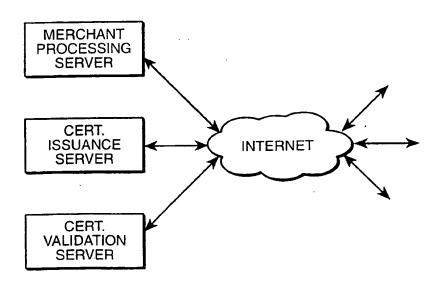


FIG.\_9

SUBSTITUTE SHEET (RULE 26)

# INTERNATIONAL SEARCH REPORT

International application No. PCT/US99/18851

IPC(6)_ :	SSIFICATION OF SUBJECT MATTER G06F 19/00		• .
OS CL :	Please See Extra Sheet.  o International Patent Classification (IPC) or to both	national classification and IPC	
B. FIEL	DS SEARCHED		
Minimum do	ocumentation searched (classification system followed	by classification symbols)	
	705/26; 500/4; 395/186; 380/4		
Documentat	ion searched other than minimum documentation to the	extent that such documents are included	in the fields searched
Electronic d	lata base consulted during the international scarch (na	me of data base and, where practicable	, search terms used)
C. DOC	UMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where ap	propriate, of the relevant passages	Relevant to claim No.
X	US 5,629,980 A (STEFIK et al) 13 M 11, 13-17, 22, 23, 26, 27-32, 34, 35,		1-40
A	US 4,817,140 A (CHANDRA et al) document.	28 March 1989, the entire	1-40
Α	US 5,191,611 A (LANG) 02 March 19	993, the entire document.	1-40
A	US 5,267,171 A (SUZUKI et al) 30 document.	November 1993, the entire	1-40
A	US 5,499,298 A (NARASIMHALU et a document.	al) 12 March 1996, the entire	1-40
A	US 5,509,070 A (SCHULL) 16 April	1996, the entire document.	1-40
X Funi	her documents are listed in the continuation of Box C	See patent family annex.	<u></u>
'A' do	pecial categories of cited documents:  secument defining the general state of the art which is not considered	"T" later document published after the inte date and not in conflict with the appi the principle or theory underlying the	lication but cited to understand
.E. es	be of particular relevance	"X" document of particular relevance; the considered novel or cannot be consider when the document is taken alone	e claimed invention cannot be red to involve an inventive step
cit	seument which may throw doubts on priority claim(s) or which is ted to establish the publication date of another citation or other ceial reason (as specified)	*Y* document of particular relevance; th	e claimed invention cannot be
*O* do	ocument referring to an oral disclosure, use, exhibition or other cans	considered to involve an inventive combined with one or more other suc being obvious to a person skilled in	h documents, such combination
	ocument published prior to the international filing date but later than e-priority date claimed	*&* document member of the same paten	
	e actual completion of the international search	Date of mailing of the international se 01 FEB 2000	arch report
Name and	mailing address of the ISA/US	Authorized officer	
Box PCT	oner of ratents and Trademarks	ALLEN MACDON De De La Companya de La	R. Matthews
Washingto	on, D.C. 20231	Telephone No. (701) 305-9708	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,

Form PCT/ISA/210 (second sheet)(July 1992)\*

# INTERNATIONAL SEARCH REPORT

International application No. PCT/US99/18851

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
category	Clarion of document, with indication, where appropriate, or all the case passages	
<b>\</b>	US 5,634,012 A (STEFIK et al) 27 May 1997, the entire document.	1-40
\	US 5,638,443 A (STEFIK et al) 10 June 1997, the entire document.	1-40
	US 5,715,403 A (STEFIK) 03 February 1998, the entire document.	1-40
P	US 5,883,954 A (RONNING) 16 March 1999, the entire document.	1-40
P	US 5,883,955 A (RONNING) 16 March 1999, the entire document.	1-40
A,P	US 5,903,880 A (BIFFAR) 11 May 1999, the entire document.	1-40
•		
	·	
	·	
*-		

Form PCT/ISA/210 (continuation of second sheet)(July 1992)\*

## INTERNATIONAL SEARCH REPORT

International application No. PCT/US99/18851

A. CLASSIFICATION OF SUBJECT MATTER: US CL : 705/26; 500/4; 395/186; 380/4

Form PCT/ISA/210 (extra sheet)(July 1992)\*